


# Huddly Cables




USB and extension cables.



# Huddly

# Cables

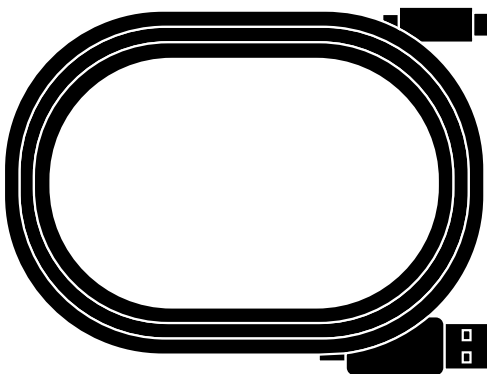

## Cable 0.6 m

## USB 3

## C to A

GTIN 7090043790290


Dimensions & Type	
Length	0.6 m
Connectors	A to C
Color	Black
Weight	24 g
Cable diameter	4.0 mm

Temperature	
Operating temperature	0 – 50°C

USB Support	
USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power	
Voltage	5 V
Rated current (max)	2 A

Compliance	
RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

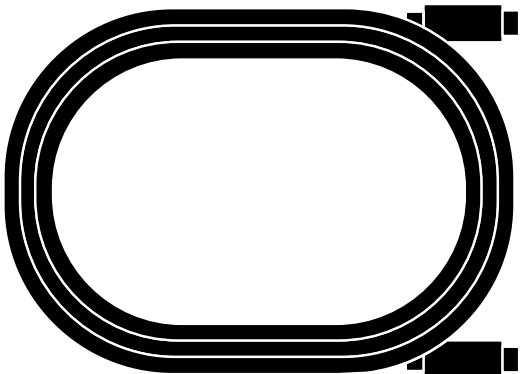

## Cable 0.6 m

## USB 3

## C to C

GTIN 7090043790337

Dimensions & Type	
Length	0.6 m
Connectors	C to C
Color	Black
Weight	29 g
Cable diameter	4.0 mm

Temperature	
Operating temperature	0 – 50°C


USB Support	
USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power	
Voltage	5 V
Rated current (max)	900 mA

Compliance	
RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-HB

# Huddly

# Cables

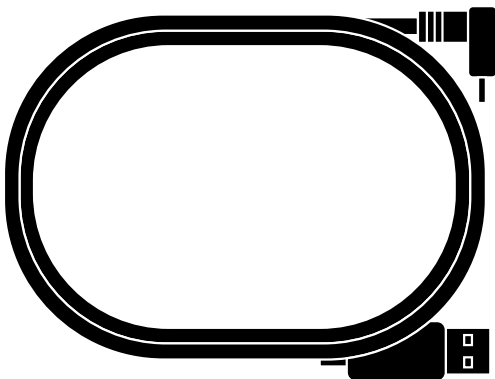

## Cable 1.15 m

## USB 3

## C to A

GTIN 7090043790351

### Dimensions & Type

Length	1.15 m
Connectors	A to C (angled)
Color	Black
Weight	46 g
Cable diameter	4.5 mm

### Temperature

Operating temperature	0 – 50°C
-----------------------	----------

### USB Support


USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

### Power

Voltage	5 V
Rated current (max)	3 A

### Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

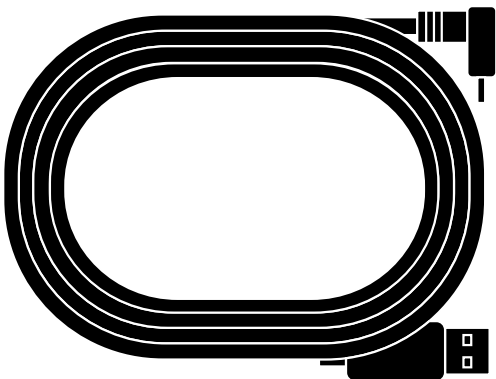

## Cable 2 m

## USB 3

## C to A

GTIN 7090043790276

### Dimensions & Type

Length	2.0 m
Connectors	A to C (angled)
Color	Black
Weight	70 g
Cable diameter	4.5 mm

### Temperature

Operating temperature	0 – 50°C
-----------------------	----------

### USB Support

USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

### Power


Voltage	5 V
Rated current (max)	3 A

### Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

# Huddly

## Cables

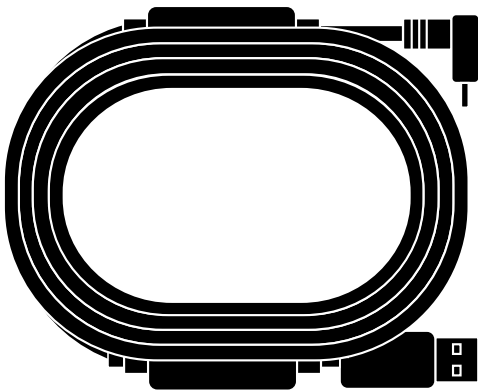


### Cable 5 m

#### USB 3

#### C to A

GTIN	70090043790368
<b>Dimensions &amp; Type</b>	
Length	5.0 m
Connectors	A to C (angled)
Color	Black
Weight	252 g
Cable diameter	4.5 mm
<b>Temperature</b>	
Operating temperature	0 – 50°C
<b>USB Support</b>	
USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No
<b>Power</b>	
Voltage	5 V
Rated current (max)	900 mA
<b>Compliance</b>	
RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

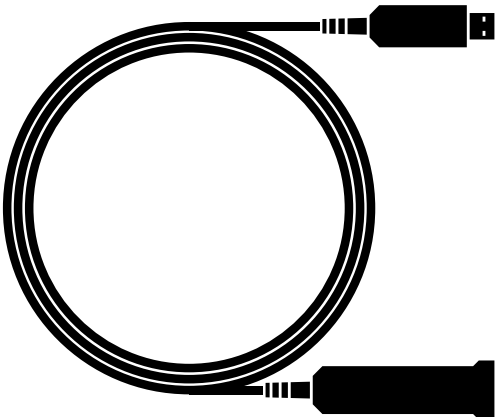



### Extension 5 m

#### USB 3 AOC

#### AM to AF

GTIN	7090043790443
<b>Dimensions &amp; Type</b>	
Length	5 m
Connectors	A (male) to A (female)
Color	Black
Weight	208 g
Cable diameter	3 mm
<b>Temperature</b>	
Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C
<b>USB Support</b>	
Only USB 3.0 Supported	
<b>Power</b>	
Voltage	5 V
Rated current (max)	900 mA

# Huddly Cables

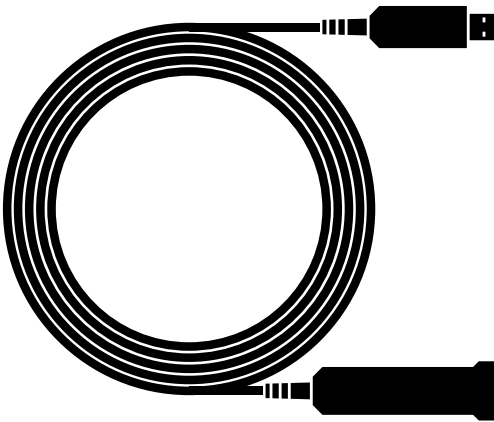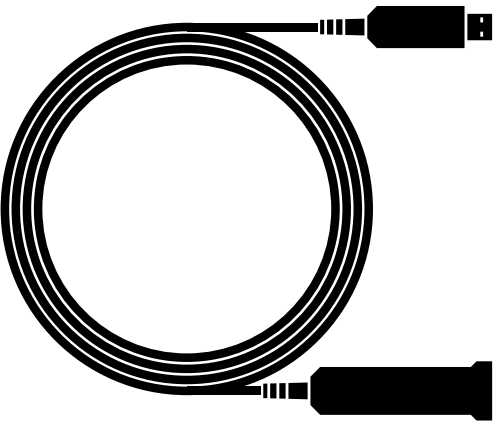

## Extension 10 m USB 3 AOC AM to AF

GTIN 7090043790450

Dimensions & Type	
Length	10 m
Connectors	A (male) to A (female)
Color	Black
Weight	283 g
Cable diameter	3 mm

Temperature	
Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C

**USB Support**  
Only USB 3.0 Supported

Power	
Voltage	5 V
Rated current (max)	900 mA

## Extension 15 m USB 3 AOC AM to AF

GTIN 7090043790436

Dimensions & Type	
Length	15 m
Connectors	A (male) to A (female)
Color	Black
Weight	388 g
Cable diameter	3 mm

Temperature	
Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C

**USB Support**  
Only USB 3.0 Supported

Power	
Voltage	5 V
Rated current (max)	900 mA